


AF63 British Plug to Fuse



Dimensions (units in mm)



Main Characteristics

British plug to fuse; fast/medium-acting;

Standard

BS1362-1973

Materials

Tube: Ceramic

End caps: Nickel-plated brass

Operating Temperature

-55°C to +125°C

Storage Conditions

+10°C to +60°C

Relative humidity: ≤75% yearly average without dew, maximum 30 days at 95%

Vibration Resistance

24 cycles at 15 min. each (60068-6)

10-60Hz at 0.75mm amplitude

60-2000Hz at 10g acceleration

Soldering Parameters


260°C. ≤5 sec (Wave Soldering)

350°C. ≤3 sec (Hand Soldering)

Soldering Peak:

260°C. 10 sec. (IEC 60068-20)

Average Time Current(I-T Curve)

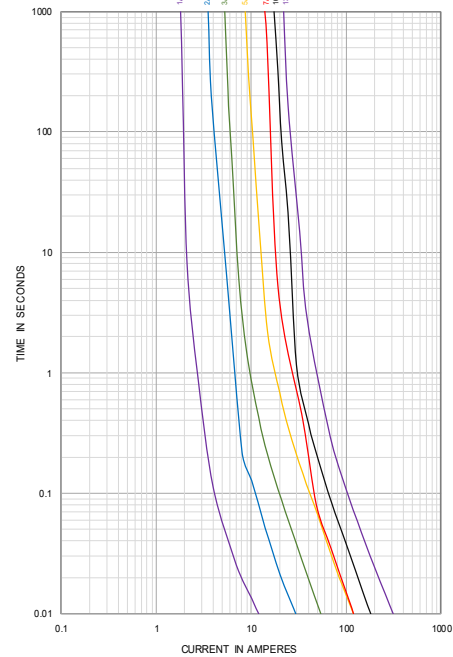

Time vs Current Characteristics: BS1362-1973

Rated Current	100%	160%	190%
1A~13A	>1000h	>30min	<30min



RoHS HF

Electrical Characteristics

Amp Code	Rated Current	Max. Voltage	Max. Power Dissipation	Breaking Capacity	Max. Voltage Drop(mV)	Typical Cold Resistance (mΩ)	Nominal Melting I ² t(A ² sec)	Color	Approvals		
									CCC	PSB	ASTA
1100	1A	264V AC	1W	6kA@ 264V AC 50Hz P.f.0.3-0.4	1000	255	1.44	black	●	○	○
1200	2A				500	86.0	8.73	black	●	○	○
1300	3A				333.3	36.8	29.16	red	●	●	●
1500	5A				200	17.0	144	black	●	●	●
1700	7A				142.8	12.0	146.4	black	●	●	●
2100	10A				100	6.59	324	black	●	●	●
2130	13A				76.9	4.55	961	brown	●	●	●

Notes: (1) Permissible continuous operating current is ≤100% at ambient temperature of 23°C (73.4°F)

(2) The current values used for calculating I²T should be within the standard range of 8ms ~ 10ms.

Ordering Information

Series	Amp Code	Supplementary Code	Qty
AF63			

