
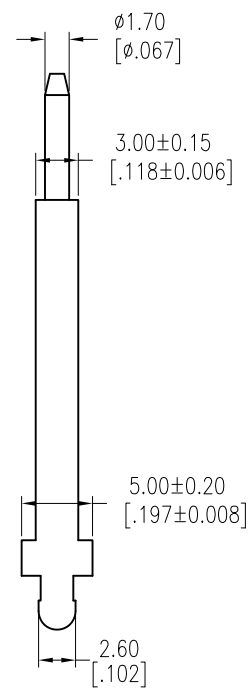
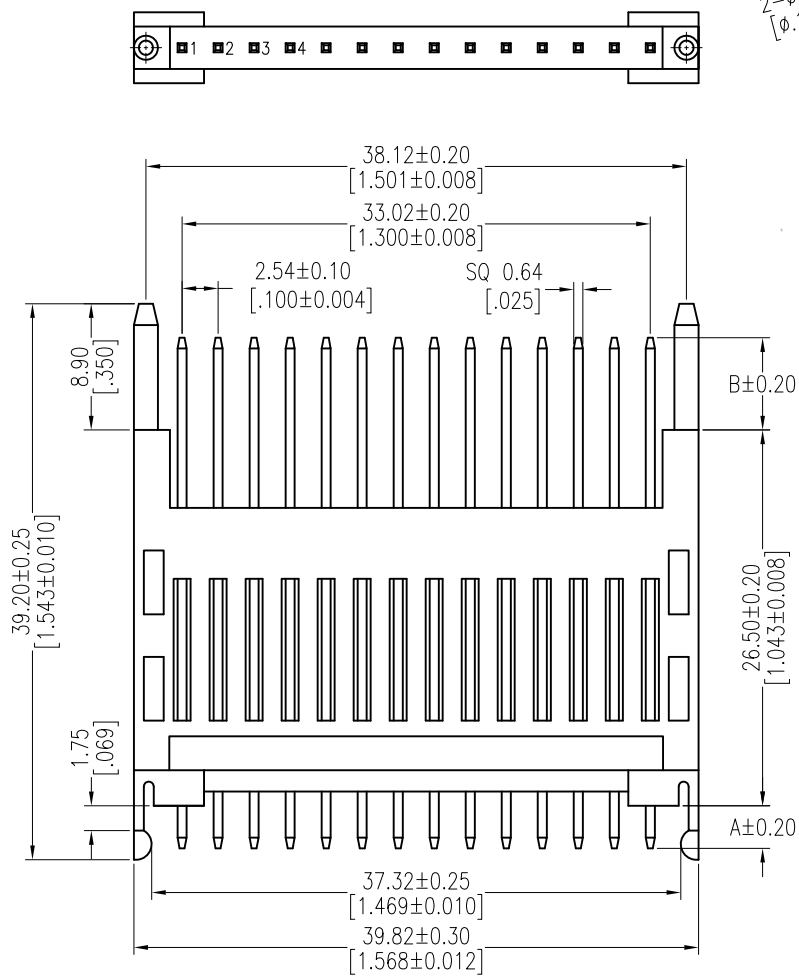


HSF

NOTES:
 Rated Current:3.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:5000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

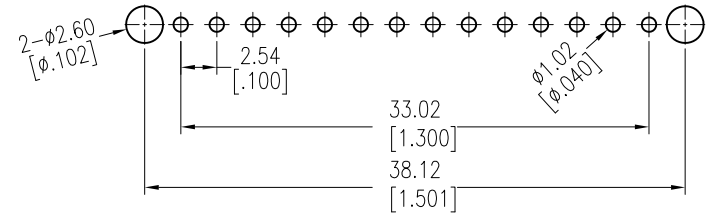

Ordering Information

11260-21 14 XX S XXX C 0 XX

Contact Plating	Pin Length	Insulator Material	Packing	Series No.
G0=Gold Flash	L=A+B+26.5	0=PE Bag	A=Tray	01~99
G3=10u"Gold	Standard:360=36.0	C=PA9T		
G4=15u"Gold				
G5=30u"Gold				

Item	Pin Length	A	B
Standard	36.00	3.00	6.50
Alternate			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
				x.x ±0.40	Ruipeng	2018/01/22	UNIT	mm	11260-2114XXSXXX0XX
A1	2018/01/22	Modify P/N		x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/06/20	NEW	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	PH2.54 1*14P 180°H=26.5
				Angle ± 3'			PROJ.		Customer NO.
				DIM TOL					